
WH25-ES Installation Steps

1. Take out the handle chain from the handle and take out the handle shaft from the pump, then put the handle assy on the pump base;



2. Fix the handle shaft, pls notice that the chain should go through the handle shaft middle hole;

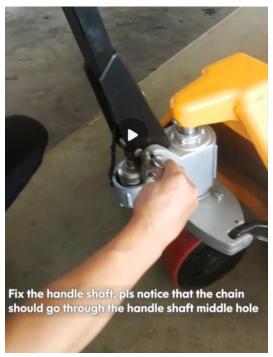

3. Press the handle down then take out the pin which fix the small piston;



4. Install the chain to lower valve, pls note that do not remove the chain nut, no need adjust the nut position;



5. Testing whether the pump can lift up and down easily $% \left(x\right) =\left(x\right) ^{2}$

