


A107122 HPT-D25 540*1150PTP


Technical data sheet for industrial trucks acc. to VDI 2198				
Distinguishing mark	1.2	Manufacturer's type designation		HPT25.0
	1.3	Drive		manual
	1.4	Operator type		hand
	1.5	Load Capacity / rated load	Q(t)	2.5
	1.6	Load centre distance	c(mm)	600
	1.8	Load distance ,centre of drive axle to fork	x(mm)	972
	1.9	Wheelbase	Y(mm)	1218
Tyres, chassis	3.1	Tyres		
	3.2	Tyre size, front	mm	Ø 200× 50
	3.3	Tyre size, rear	mm	Ø80× 70
	3.4	Additional wheels(dimensions)	mm	—
	3.5	Wheels, number front/rear(x=driven wheels)		2/4
	3.6	Tread, front	b10 (mm)	130
	3.7	Tread, rear	b11 (mm)	380
Dimensions	4.4	Lift (standard mast)	h3 (mm)	115
	4.9	Height of tiller in drive position min/max	h14(mm)	1230
	4.15	Height, lowered	h13 (mm)	85
	4.19	Overall length	l1 (mm)	1521
	4.20	Length to face of forks	l2 (mm)	371
	4.21	Overall width	b1 (mm)	540
	4.22	Fork dimensions	s/e/l (mm)	48/160/1150
	4.25	Distance between fork- arms	b5 (mm)	540
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	37
	4.34	Aisle width for pallets 800X1200 lengthways	Ast (mm)	2064
	4.35	Turning radius	Wa (mm)	1251

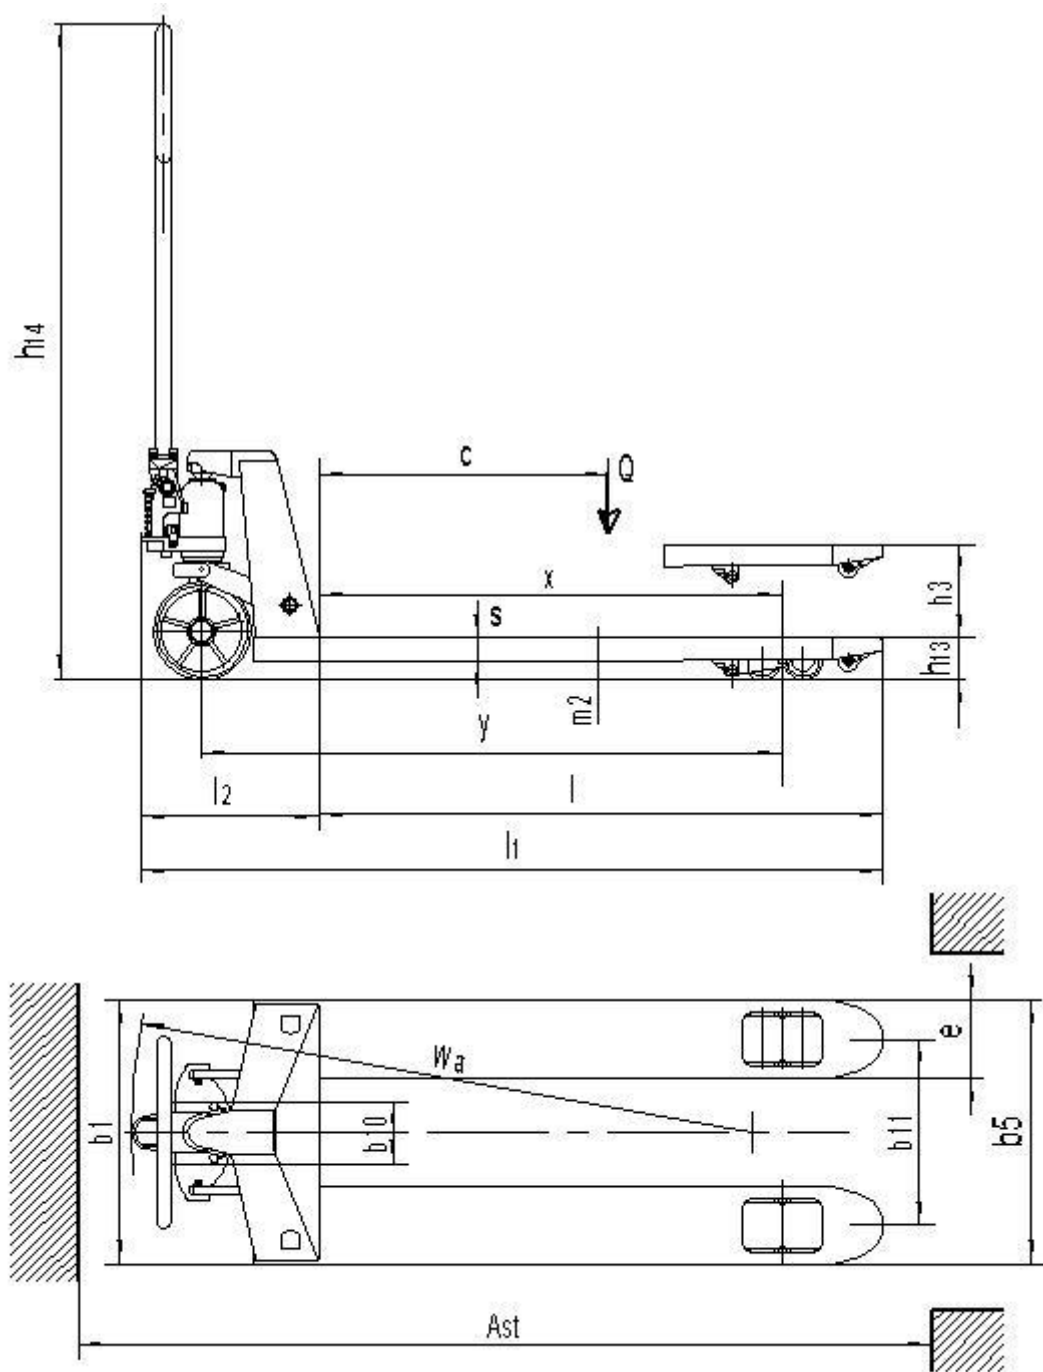

A107123 HPT-D20 540*800RTN

Technical data sheet for industrial trucks acc. to VDI 2198

Distinguishing mark	1.2	Manufacturer's type designation		DF
	1.3	Drive		manual
	1.4	Operator type		hand
	1.5	Load Capacity / rated load	Q(t)	1.2
	1.6	Load centre distance	c(mm)	400
	1.8	Load distance ,centre of drive axle to fork	x(mm)	622
	1.9	Wheelbase	Y(mm)	868
Tyres, chassis	3.1	Tyres		
	3.2	Tyre size, front	mm	Ø 200× 50
	3.3	Tyre size, rear	mm	Ø80× 70
	3.4	Additional wheels(dimensions)	mm	—
	3.5	Wheels, number front/rear(x=driven wheels)		2/4
	3.6	Tread, front	b10 (mm)	130
	3.7	Tread, rear	b11 (mm)	380
Dimensions	4.4	Lift (standard mast)	h3 (mm)	115
	4.9	Height of tiller in drive position min/max	h14(mm)	1230
	4.15	Height, lowered	h13 (mm)	85
	4.19	Overall length	l1 (mm)	1171
	4.20	Length to face of forks	l2 (mm)	371
	4.21	Overall width	b1 (mm)	540
	4.22	Fork dimensions	s/e/l (mm)	48/160/800
	4.25	Distance between fork- arms	b5 (mm)	540
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	37

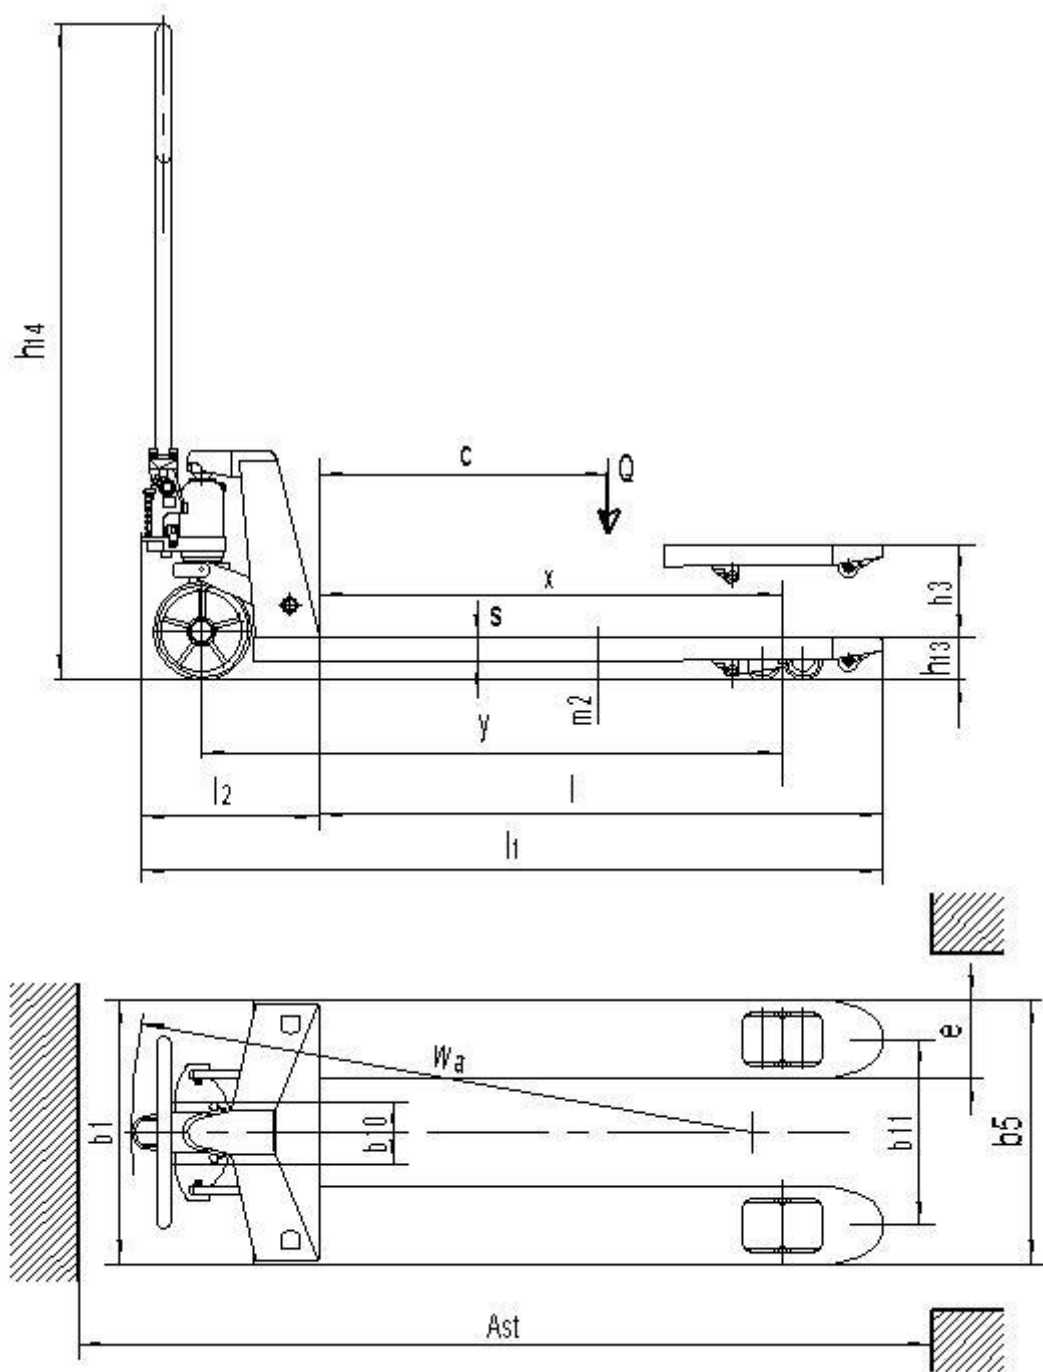

A107124 HPT-D20 540*1150RTN

Technical data sheet for industrial trucks acc. to VDI 2198

Distinguishing mark	1.2	Manufacturer's type designation		HPT20.0
	1.3	Drive		manual
	1.4	Operator type		hand
	1.5	Load Capacity / rated load	Q(t)	2.0
	1.6	Load centre distance	c(mm)	600
	1.8	Load distance ,centre of drive axle to fork	x(mm)	972
	1.9	Wheelbase	Y(mm)	1218
Tyres, chassis	3.1	Tyres		
	3.2	Tyre size, front	mm	Ø 200× 50
	3.3	Tyre size, rear	mm	Ø80× 70
	3.4	Additional wheels(dimensions)	mm	—
	3.5	Wheels, number front/rear(x=driven wheels)		2/4
	3.6	Tread, front	b10 (mm)	130
	3.7	Tread, rear	b11 (mm)	380
Dimensions	4.4	Lift (standard mast)	h3 (mm)	115
	4.9	Height of tiller in drive position min/max	h14(mm)	1230
	4.15	Height, lowered	h13 (mm)	85
	4.19	Overall length	l1 (mm)	1521
	4.20	Length to face of forks	l2 (mm)	371
	4.21	Overall width	b1 (mm)	540
	4.22	Fork dimensions	s/e/l (mm)	48/160/1150
	4.25	Distance between fork- arms	b5 (mm)	540
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	37
	4.34	Aisle width for pallets 800X1200 lengthways	Ast (mm)	2064
	4.35	Turning radius	Wa (mm)	1251

