


Datasheet for pallet truck HPT-A20(540X1500)

Type sheet for industrial truck acc. to VDI 2198			
Distinguishing mark	1.2	Manufacturer's type designation	HPT-A20(540X1500)
	1.4	Operator type	manual
	1.5	Load Capacity / rated load	Q (kg) 2000
	1.6	Load centre distance	c (mm) 750
	1.8	Load distance, centre of drive axle to fork	x (mm) 1235
Weight	1.9	Wheelbase	y (mm) 1475
	2.1	Service weight	kg 82
Tyres, chassis	3.1	Tires	PU / Rubber / Nylon ¹⁾
	3.2	Tire size, front	Øx w (mm) Ø200x50
	3.3	Tire size, rear	Øx w (mm) Ø80x70
	3.5	Wheels, number front/rear(x=driven wheels)	2/2 or 2/4
	3.6	Tread, front	b ₂₀ (mm) 130
Basic Dimensions	3.7	Tread, rear	b ₈₀ (mm) 380
	4.4	Lift height	h ₂ (mm) 115
	4.9	Height of tiller in drive position min./ max.	h ₂₄ (mm) 673/1230
	4.14	Standing height, elevated	h ₁₂ (mm) 200
	4.15	Height, lowered	h ₁₃ (mm) 85
	4.19	Overall length	l ₁ (mm) 1890
	4.20	Length to face of forks	l ₂ (mm) 390
	4.21	Overall width	b ₁ (mm) 540
	4.22	Fork dimensions	s/e/l (mm) 48/160/1500
	4.25	Width over forks	b ₁₁ (mm) 540
Performance data	4.32	Ground clearance, centre of wheelbase	m ₂ (mm) 37
	4.33	Aisle width for pallets 1000x1200 crossways	Ast (mm) 2270
	4.34	Aisle width for pallets 800x1200 lengthways	Ast (mm) 2027
	4.35	Turning radius	Wa (mm) 1625
	5.3	Lowering speed, laden/ unladen	m/s 0.09/0.05

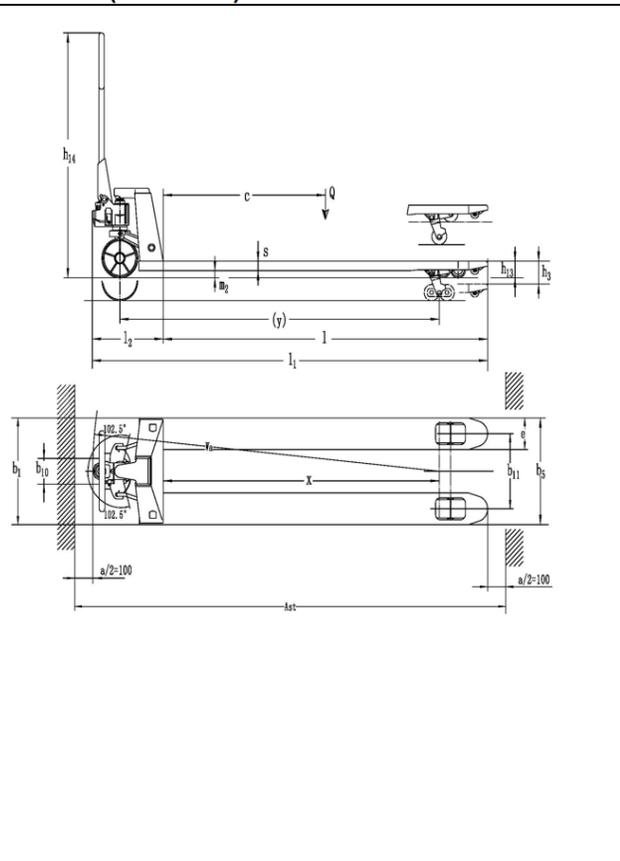

Note: 1) Option